
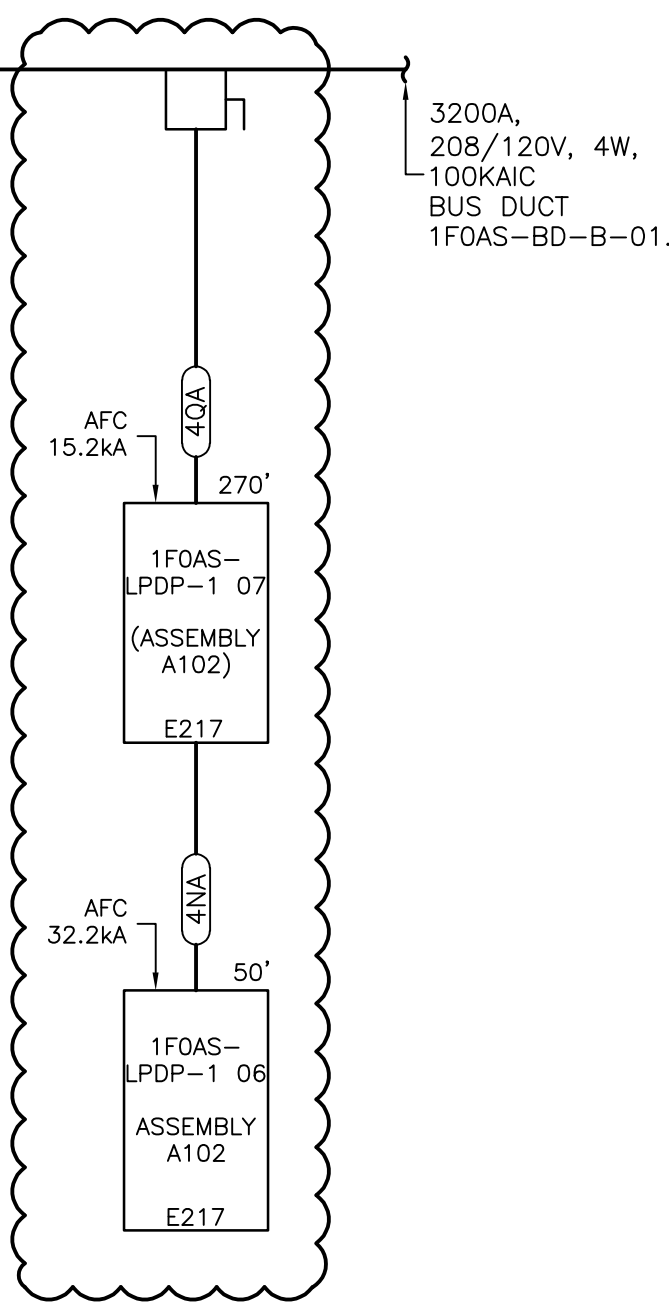


GENERAL NOTES

- A. REFERENCE FEEDER SCHEDULE, E011
- B. CABLE LENGTHS WHEN INDICATED ON ONE-LINE ARE APPROXIMATE AND ARE FOR REFERENCE ONLY FOR CALCULATIONS AND ARE NOT TO BE USED FOR MATERIAL TAKEOFFS.
- C. SECONDARY UNIT SUBSTATIONS: REFER TO SPECIFICATION #26 11 16 12.
- D. UNIT SUBSTATION SCADA COMMUNICATIONS SHALL INCLUDE ALL HARDWARE DEVICES TO COMMUNICATE I/O (VIA MODBUS TCP COMMUNICATIONS) INCLUDING, BUT NOT LIMITED TO, THE FOLLOWING:
PRIMARY SWITCH STATUS (OPEN/CLOSED)
TRANSFORMER WINDING TEMPERATURE
TRANSFORMER FAN RUN STATUS
BREAKER STATUS
POWER METER DATA
- E. ALL SWITCHBOARDS, SWITCHGEAR, AND PANELBOARDS SUPPLIED BY FEEDERS SHALL BE PERMANENTLY MARKED TO INDICATE EACH DEVICE OR EQUIPMENT WHERE THE POWER ORIGINATES. THE LABEL SHALL BE PERMANENTLY AFFIXED, OF SUFFICIENT DURABILITY TO WITHSTAND THE ENVIRONMENT INVOLVED, AND NOT HANDWRITTEN.

KEYED NOTES

1. NOT USED.
2. PRIOR TO CLOSING A SWITCH, THE OTHER SWITCH MUST BE OPENED USING KIRK KEY INTERLOCK TO PREVENT CONNECTION OF MULTIPLE SOURCES. REFER TO SEQUENCE OF OPERATIONS BY MANUFACTURER IN EQUIPMENT SUBMITTAL.
3. NOT USED
4. SQUARE D/ SCHNEIDER ION 9000 WITH RS-485 COMMUNICATIONS.
5. ENGINEERED CABLE BUS ASSEMBLY, CONDUIT, OR CABLE TRAY TO BUS DUCT CABLE TAP BOX.

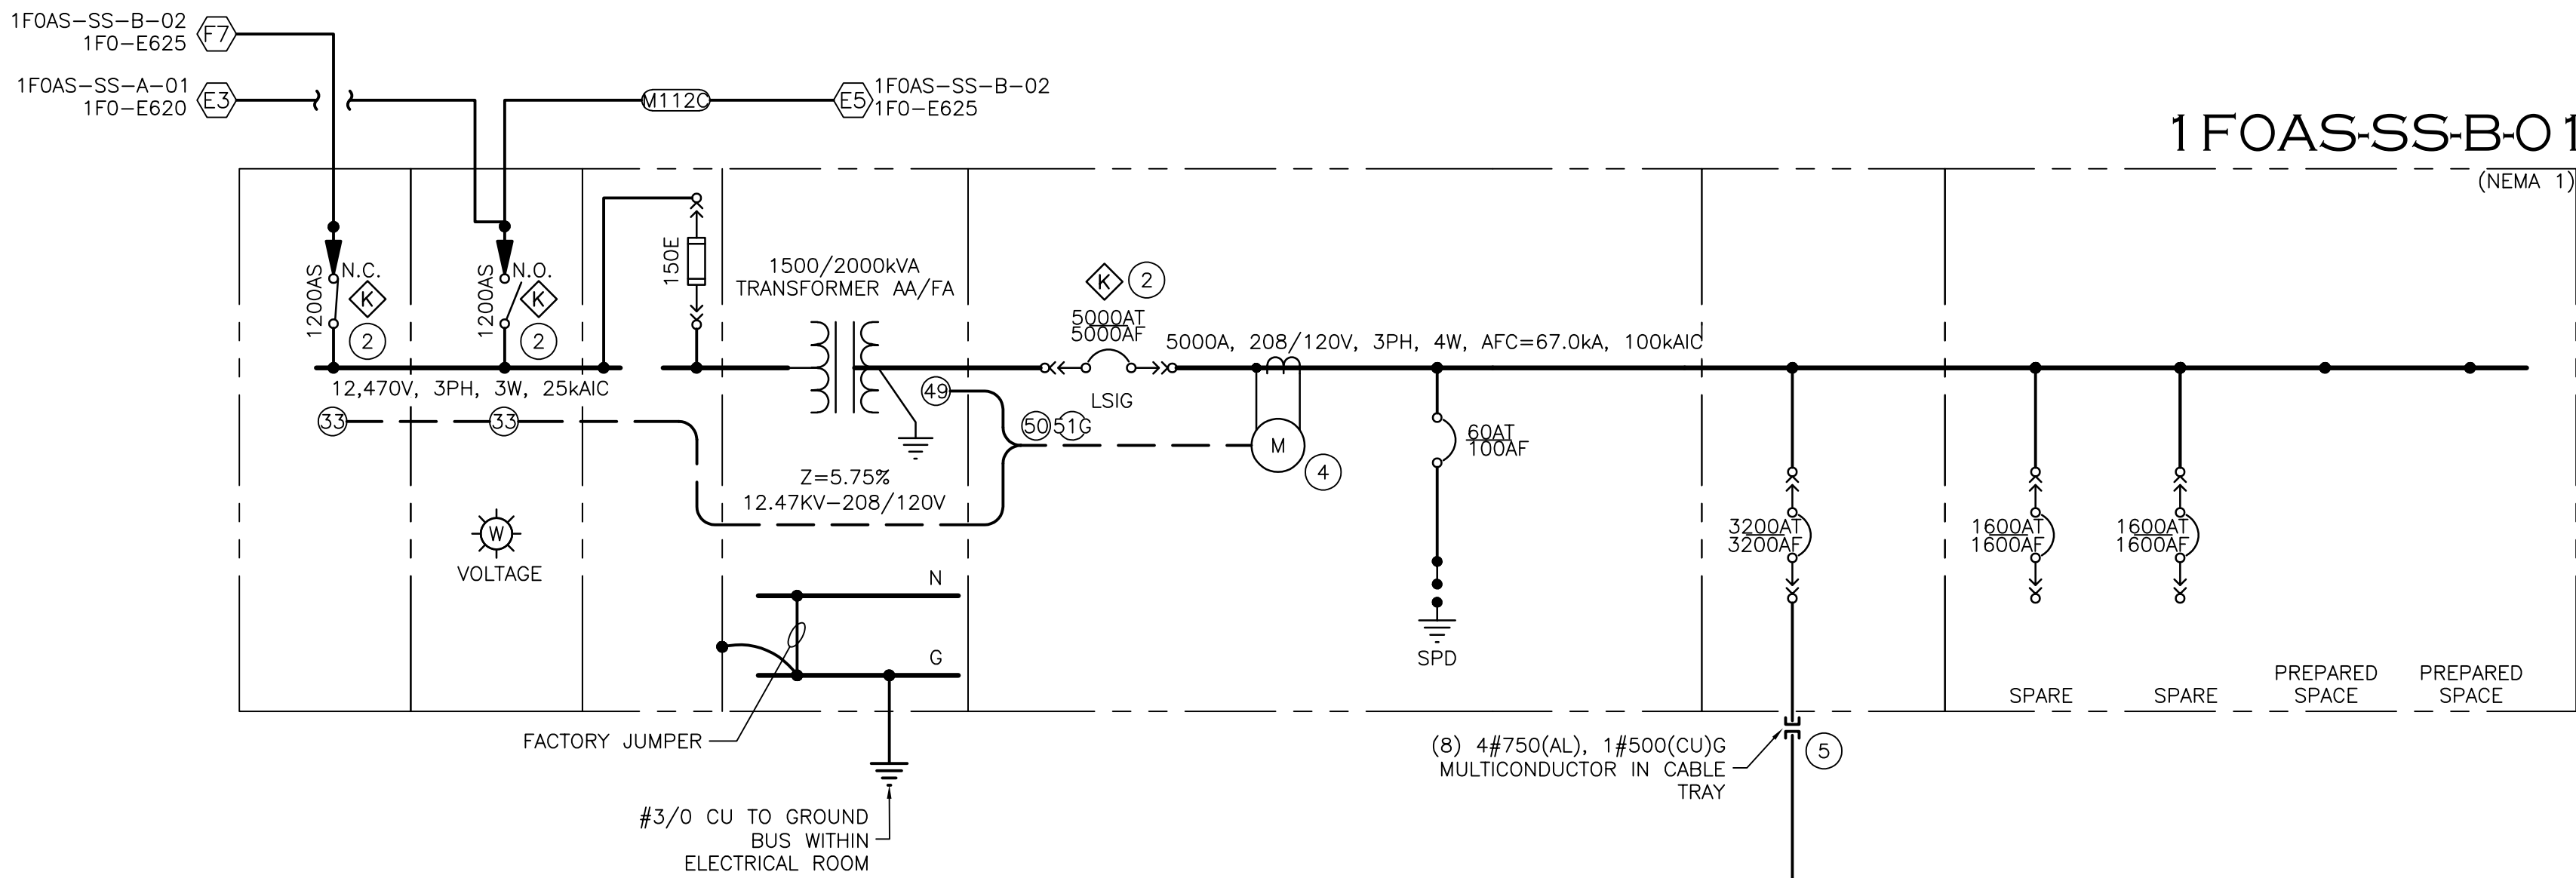

BUS DUCT NAME 1FOAS-BD-B-01									
BUS PLUG	EQUIPMENT	TAG #	RATINGS			LOADING (KVA)			
			VOLTS	FRAME	TRIP	LOAD	DEM	LOAD	FLA
COMMON LINEAR RACK (FUTURE)		1	208	150	100	33	0.4	90	
COMMON ACW LOADER (FUTURE)		2	208	150	100	25	0.4	10	
COMMON XW LOADER (FUTURE)		3	208	150	100	25	0.4	10	
COMMON XW LOADER (FUTURE)		4	208	250	150	42	0.4	17	
ACW (FUTURE)		5	208	250	150	42	0.4	17	
CF (FUTURE)		6	208	150	100	27	0.4	11	
COMMON FAN LOADER (FUTURE)		7	208	250	125	35	0.4	14	
COMMON IS LOADER (FUTURE)		8	208	250	150	43	0.4	17	
ISI		9	208	150	70	30	0.4	8	
COMMON JRY (FUTURE)		10	208	150	100	30	0.4	12	
COMMON CRW (FUTURE)		11	208	150	125	33	0.4	13	
SMW ROTARY (FUTURE)		12	208	400	400	104	0.4	30	
SMW LIP LOADER (FUTURE)		13	208	400	400	295	0.4	38	
HE JAW TEST (FUTURE)		14	208	250	250	74	0.4	20	
COMMON X-RAY		15	208	150	25	20	0.4	8	
COMMON X-RAY PANEL (FUTURE)		16	208	600	600	183	0.4	17	
COMMON ELB2 PANEL (FUTURE)		17	208	400	300	115	0.4	48	
COMMON LHS PANEL (FUTURE)		18	208	250	200	53	0.4	21	
COMMON WASHING (FUTURE)		19	208	400	400	104	0.4	30	
COMMON IR UNLOADER (FUTURE)		20	208	250	250	67	0.4	27	
CBI 2170		21	208	150	100	38	0.4	12	
CCI 2170		22	208	150	100	30	0.4	12	
CCI 2170		23	208	150	100	30	0.4	12	
CCI 2170		24	208	150	100	30	0.4	12	
CTE 2170		25	208	150	100	30	0.4	12	
CTE 2170		26	208	150	100	30	0.4	12	
CTE 2170		27	208	150	100	30	0.4	12	
CTE 2170		28	208	150	100	30	0.4	12	
CTE 2170		29	208	150	100	30	0.4	12	
CTE 2170		30	208	150	100	15	0.4	6	
CTE 2170		31	208	150	100	15	0.4	6	
CEP 2170		32	208	250	250	49	0.4	20	
CEP 2170		33	208	250	250	49	0.4	20	
CSW 2170		34	208	150	125	39	0.4	18	
CSW 2170		35	208	150	125	39	0.4	18	
CRACK 2170		36	208	150	125	19	0.4	8	
CRACK 2170		37	208	150	125	19	0.4	8	
COMMON WASHING 2170		38	208	600	600	175	0.4	82	
WATER HEATER 2170		39	208	600	600	173	0.4	69	
COMMON WASHING 2170		40	208	600	600	175	0.4	82	
WATER HEATER 2170		41	208	600	600	173	0.4	69	
ASSEMBLY MATERIAL STK 2170		42	208	250	250	31	0.2	14	
EMPTY PALLET STK 2170		43	208	150	125	48	0.2	18	
EMPTY PALLET STK 2170		44	208	150	125	48	0.2	18	
1FOAS-LPDP-1 07		55	208	600	600	69	1.0	69	

NOTES:
*800A AND ABOVE BUS PLUGS REQUIRE MANUFACTURER INSTALLED BUS PLATE. SEE POWER PLAN FOR LOCATION

TOTAL LOAD (KVA)	2545	1026	TOTAL DEMAND LOAD (KVA)
		2848.6	DEMAND AMPS
		3200	RATING (A)
		89 %	LOADING

PROVIDE AND INSTALL BUS PLUGS FOR PANELS

1 ONE LINE DIAGRAM - (1FO) ASSEMBLY-1 "B" (PARTIAL)
NO SCALE



2 EQUIPMENT ELEVATION
NO SCALE

3 BUS DUCT LOAD SCHEDULE
NO SCALE

WARE MALCOMB
ARCHITECTURE CIVIL ENGINEERING
PLANNING BUILDING MEASUREMENT
INTERIORS
2777 E Camelback Rd. Suite #205
Phoenix, AZ 85016
P 480.907.2286

06/30/2025
30536
WILLIAM J. BETHURUM, IV
SEAL EXPIRES: 06/30/26

VOLTA
1730 E. Northern Avenue, Ste. 100, Phoenix, AZ 85020
Tel: (480) 688-0011 voltaaz.com
NYS 215101 10.30.25

PROJECT ALPHA
1F0 - MAIN MANUFACTURING BUILDING
EAST PECOS ROAD
QUEEN CREEK, ARIZONA 85140

07/03/2025 ESK-144 IDC-129
Corrections
RFI-2777 Response

PA/PM: WB
DRAWN BY: ETS/AO/AUG
JOB NO.: PHX21-5038-00

SHEET
1F0-E624
PLOT DATE: 06/30/2025