


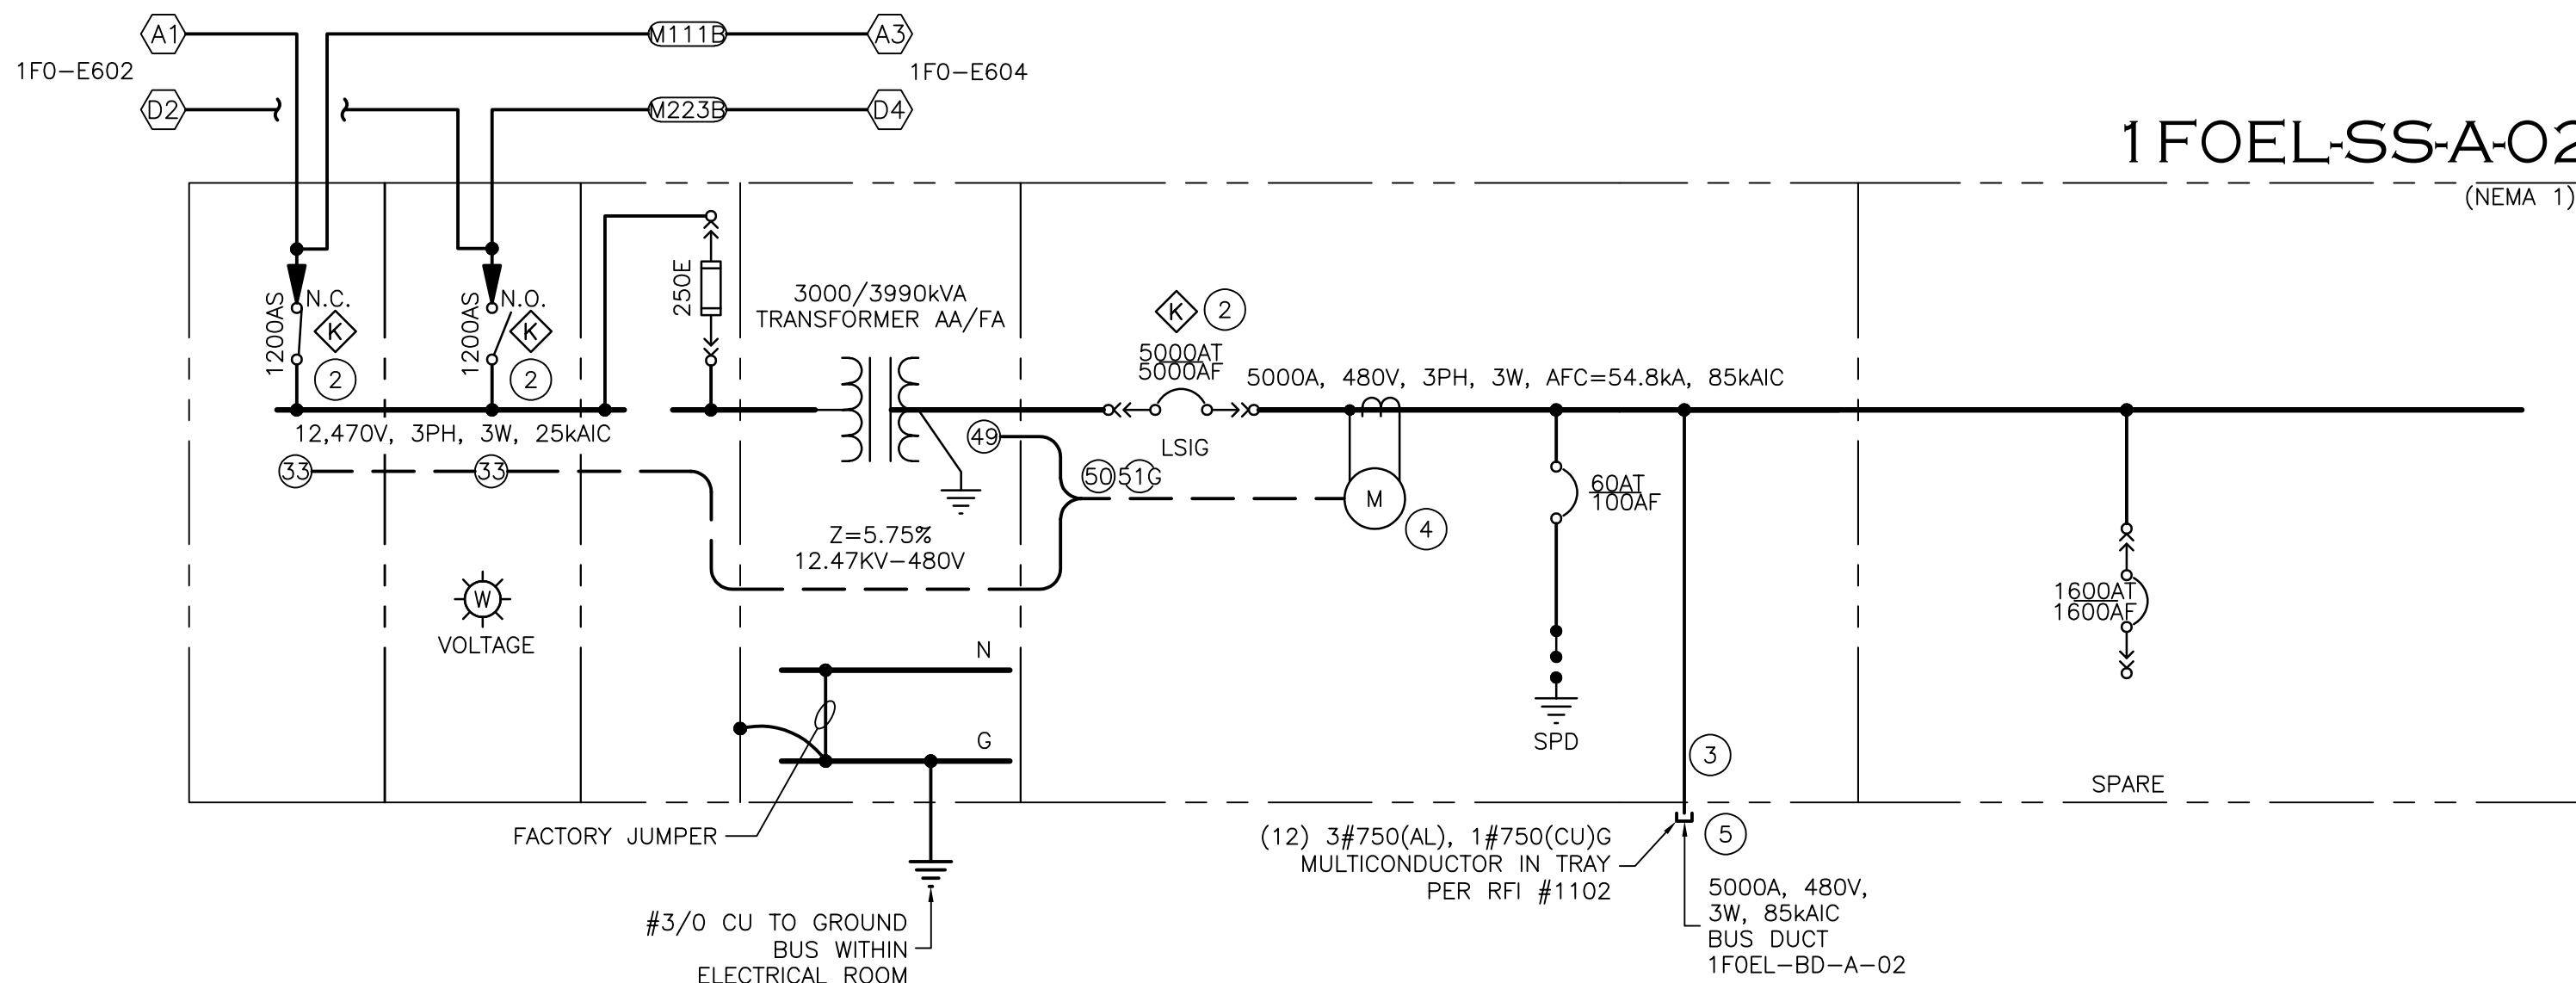

GENERAL NOTES

- A. REFERENCE FEEDER SCHEDULE, E011
- B. CABLE LENGTHS WHEN INDICATED ON ONE-LINE ARE APPROXIMATE AND ARE FOR REFERENCE ONLY FOR CALCULATIONS AND ARE NOT TO BE USED FOR MATERIAL TAKEOFFS.
- C. SECONDARY UNIT SUBSTATIONS: REFER TO SPECIFICATION #26 11 16 12.
- D. UNIT SUBSTATION SCADA COMMUNICATIONS SHALL INCLUDE ALL HARDWARE DEVICES TO COMMUNICATE I/O (VIA MODBUS TCP COMMUNICATIONS) INCLUDING, BUT NOT LIMITED TO, THE FOLLOWING:
 - PRIMARY SWITCH STATUS (OPEN/CLOSED)
 - TRANSFORMER WINDING TEMPERATURE
 - TRANSFORMER FAN RUN STATUS
 - BREAKER STATUS
 - POWER METER DATA
- E. ALL SWITCHBOARDS, SWITCHGEAR, AND PANELBOARDS SUPPLIED BY FEEDER SHALL BE PERMANENTLY MARKED TO INDICATE EACH DEVICE OR EQUIPMENT WHERE THE POWER ORIGINATES. THE LABEL SHALL BE PERMANENTLY AFFIXED OF SUFFICIENT DURABILITY TO WITHSTAND THE ENVIRONMENT INVOLVED, AND NOT HANDWRITTEN.


KEYED NOTES

1. NOT USED.
2. PRIOR TO CLOSING A SWITCH, THE OTHER SWITCH MUST BE OPENED USING KIRK KEY INTERLOCK TO PREVENT CONNECTION OF MULTIPLE SOURCES. REFER TO SEQUENCE OF OPERATIONS BY MANUFACTURER IN EQUIPMENT SUBMITTAL.
3. ADD LUG SECTION FOR CABLE BUS CONNECTION WHEN REQUIRED BY MANUFACTURER.
4. SQUARE D/ SCHNEIDER ION 9000 WITH RS-485 COMMUNICATIONS.
5. ENGINEERED CABLE BUS ASSEMBLY, CONDUIT, OR CABLE TRAY TO BUS DUCT CABLE TAP BOX.

BUS DUCT NAME									
1FOEL-BDA-02									
		RATINGS				LOADING (KVA)			
BUS PLUG	EQUIPMENT	TAG #	VOLTS	AMP FRAME	TRIP	LOAD	DEM LOAD	FLA	NOTES
ANODE(-)	NO.1 CLEANER #1 MIXER	1	480	250	225	94	0.4	38	113
ANODE(-)	NO.2 CLEANER #1 MIXER	2	480	250	225	94	0.4	38	113
ANODE(-)	NO.3 CLEANER #1 MIXER	3	480	250	225	94	0.4	38	113
ANODE(-)	NO.3 CLEANER (BACK)	4	480	250	225	94	0.4	38	113
ANODE(-)	NO.3 CLEANER (TOP)	5	480	250	225	94	0.4	38	113
ANODE(-)	NO.3 BACK SLURRY TRANS PANEL	6	480	150	100	59	0.4	24	71
ANODE(-)	NO.3 TOP SLURRY TRANS PANEL	7	480	150	100	59	0.4	24	71
ANODE(-)	FEED VESSEL 3(300L) (BACK)	8	480	250	150	59	0.4	24	71
ANODE(-)	FEED VESSEL 3(300L) (BACK)	9	480	250	150	59	0.4	24	71
ANODE(-)	FEED VESSEL 3(300L) (TOP)	10	480	250	150	59	0.4	24	71
ANODE(-)	FEED VESSEL 3(300L) (TOP)	11	480	250	150	59	0.4	24	71
ANODE(-)	COATER PUB PANEL	12	480	150	50	23	0.4	9	28
ANODE(-)	COATER AC0 POWER PANEL	13	480	400	400	270	0.4	108	325
ANODE(-)	COATER AC2 POWER PANEL	14	480	400	400	270	0.4	108	325
ANODE(-)	COATER AC3A POWER PANEL	15	480	250	200	118	0.4	47	142
ANODE(-)	COATER AC3B POWER PANEL	16	480	250	200	130	0.4	52	156
ANODE(-)	COATER AC4A POWER PANEL	17	480	250	200	118	0.4	47	142
ANODE(-)	COATER AC4B POWER PANEL	18	480	250	200	130	0.4	52	156
ANODE(-)	COATER ACS POWER PANEL	19	480	250	250	141	0.4	57	170
ANODE(-)	TRANSFER TANK 3 (800L) (BACK)	20	480	250	150	59	0.4	24	71
ANODE(-)	TRANSFER TANK 3 (800L) (BACK)	21	480	250	150	59	0.4	24	71
ANODE(-)	TRANSFER TANK 3 (800L) (TOP)	22	480	250	150	59	0.4	24	71
ANODE(-)	TRANSFER TANK 3 (800L) (TOP)	23	480	250	150	59	0.4	24	71
ANODE(-)	COATER PUJ PANEL	24	480	150	125	71	0.4	28	85
ANODE(-)	COATER HEATER PANEL 1-1	25	480	600	600	380	0.9	342	457
ANODE(-)	COATER HEATER PANEL 1-2	26	480	600	600	380	0.9	342	457
ANODE(-)	COATER HEATER PANEL 1-3	27	480	600	600	380	0.9	342	457
ANODE	CLEANER #2 MIXER	28	480	250	225	94	1.0	94	113
ANODE	CLEANER #2 MIXER	29	480	250	225	94	1.0	94	113
ANODE	CLEANER #2 MIXER	30	480	250	225	94	1.0	94	113
ANODE(-)	COATER HEATER PANEL 2-1	31	480	600	600	380	0.9	342	457
ANODE(-)	COATER HEATER PANEL 2-2	32	480	600	600	380	0.9	342	457
ANODE(-)	COATER HEATER PANEL 2-3	33	480	600	600	380	0.9	342	457
ANODE(-)	NO.2 BACK SLURRY TRANS PANEL	35	480	150	100	59	0.4	24	71
ANODE(-)	FEED VESSEL 2(300L) BACK	36	480	250	150	59	0.4	24	71
ANODE(-)	FEED VESSEL 2(300L) BACK	37	480	250	150	59	0.4	24	71
ANODE(-)	TRANSFER TANK 2(800L) BACK	38	480	250	150	59	0.4	24	71
ANODE(-)	TRANSFER TANK 2(800L) BACK	39	480	250	150	59	0.4	24	71
ANODE(-)	NO.2 TOP SLURRY TRANS PANEL	41	480	150	100	59	0.4	24	71

3 BUS DUCT LOAD SCHEDULE

NO SCALE

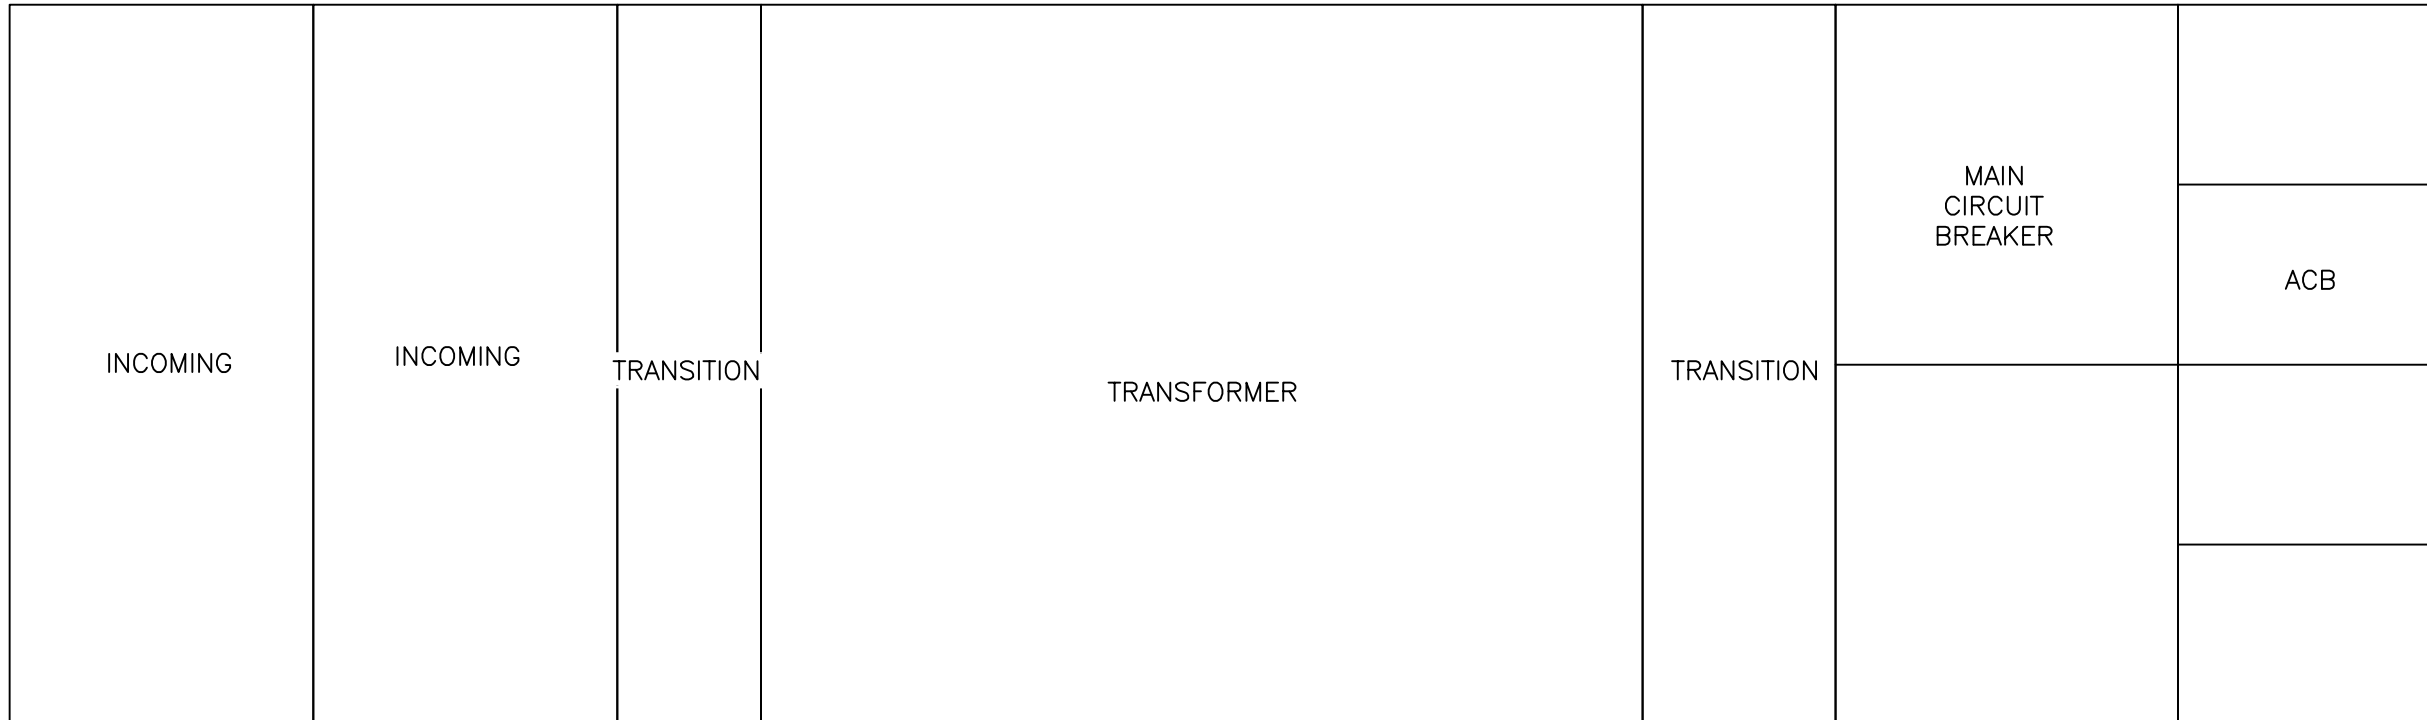

2 EQUIPMENT ELEVATION

NO SCALE

THE PROPERTY AND COPYRIGHT OF WARE MALCOMB AND SHALL
ELECTRICAL ONE LINE DIAGRAM

DATE	REF
10/16/2024	IDC-074 1F0 CD PROGRESS SET (MAY 2024)
11/01/2024	IDC-074 1F0 FULL CD PACKAGE
12/17/2024	1F0 IDC-074 REVISIONS
03/11/2025	1F0 CD REVISIONS
06/19/2025	1F0 CD REISSUANCE
07/24/2025	1F0 CD PERMIT RESUBMISSION
10/23/2025	1F0 BULLETIN #1

PA/PM:	WB
DRAWN BY.:	ETS/AO/IA/JG
JOB NO.:	PHX21-5038-00



SHEET

1F0-E603

PLOT DATE: 10/23/2025

PROJECT ALPHA

1F0 - MAIN MANUFACTURING BUILDING
EAST PECOS ROAD
QUEEN CREEK, ARIZONA 85140

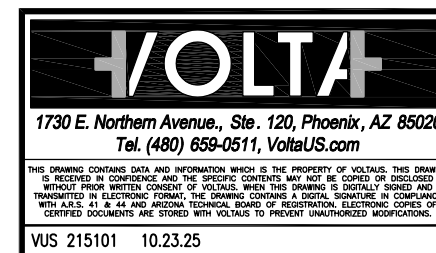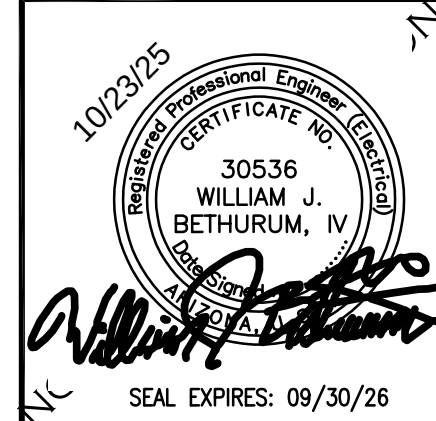[illegible]