


GENERAL NOTES

- A. REFERENCE FEEDER SCHEDULE, E011
- B. CABLE LENGTHS WHEN INDICATED ON ONE-LINE ARE APPROXIMATE AND ARE FOR REFERENCE ONLY FOR CALCULATIONS AND ARE NOT TO BE USED FOR MATERIAL TAKEOFFS.
- C. SECONDARY UNIT SUBSTATIONS: REFER TO SPECIFICATION #26 11 16 12.
- D. UNIT SUBSTATION SCADA COMMUNICATIONS SHALL INCLUDE ALL HARDWARE DEVICES TO COMMUNICATE I/O (VIA MODBUS TCP COMMUNICATIONS) INCLUDING, BUT NOT LIMITED TO, THE FOLLOWING:
- PRIMARY SWITCH STATUS (OPEN/CLOSED)
 - TRANSFORMER WINDING TEMPERATURE
 - TRANSFORMER FAN RUN STATUS
 - BREAKER STATUS
 - POWER METER DATA
- E. ALL SWITCHBOARDS, SWITCHGEAR, AND PANELBOARDS SUPPLIED BY FEEDERS SHALL BE PERMANENTLY MARKED TO INDICATE EACH DEVICE OR EQUIPMENT WHERE THE POWER ORIGINATES. THE LABEL SHALL BE PERMANENTLY AFFIXED, OF SUFFICIENT DURABILITY TO WITHSTAND THE ENVIRONMENT INVOLVED, AND NOT HANDWRITTEN.

KEYED NOTES


1. NOT USED.
2. PRIOR TO CLOSING A SWITCH, THE OTHER SWITCH MUST BE OPENED USING KIRK KEY INTERLOCK TO PREVENT CONNECTION OF MULTIPLE SOURCES. REFER TO SEQUENCE OF OPERATIONS BY MANUFACTURER IN EQUIPMENT SUBMITTAL.
3. NOT USED
4. SQUARE D/ SCHNEIDER ION 9000 WITH RS-485 COMMUNICATIONS.
5. ENGINEERED CABLE BUS ASSEMBLY, CONDUIT, OR CABLE TRAY TO BUS DUCT CABLE TAP BOX.

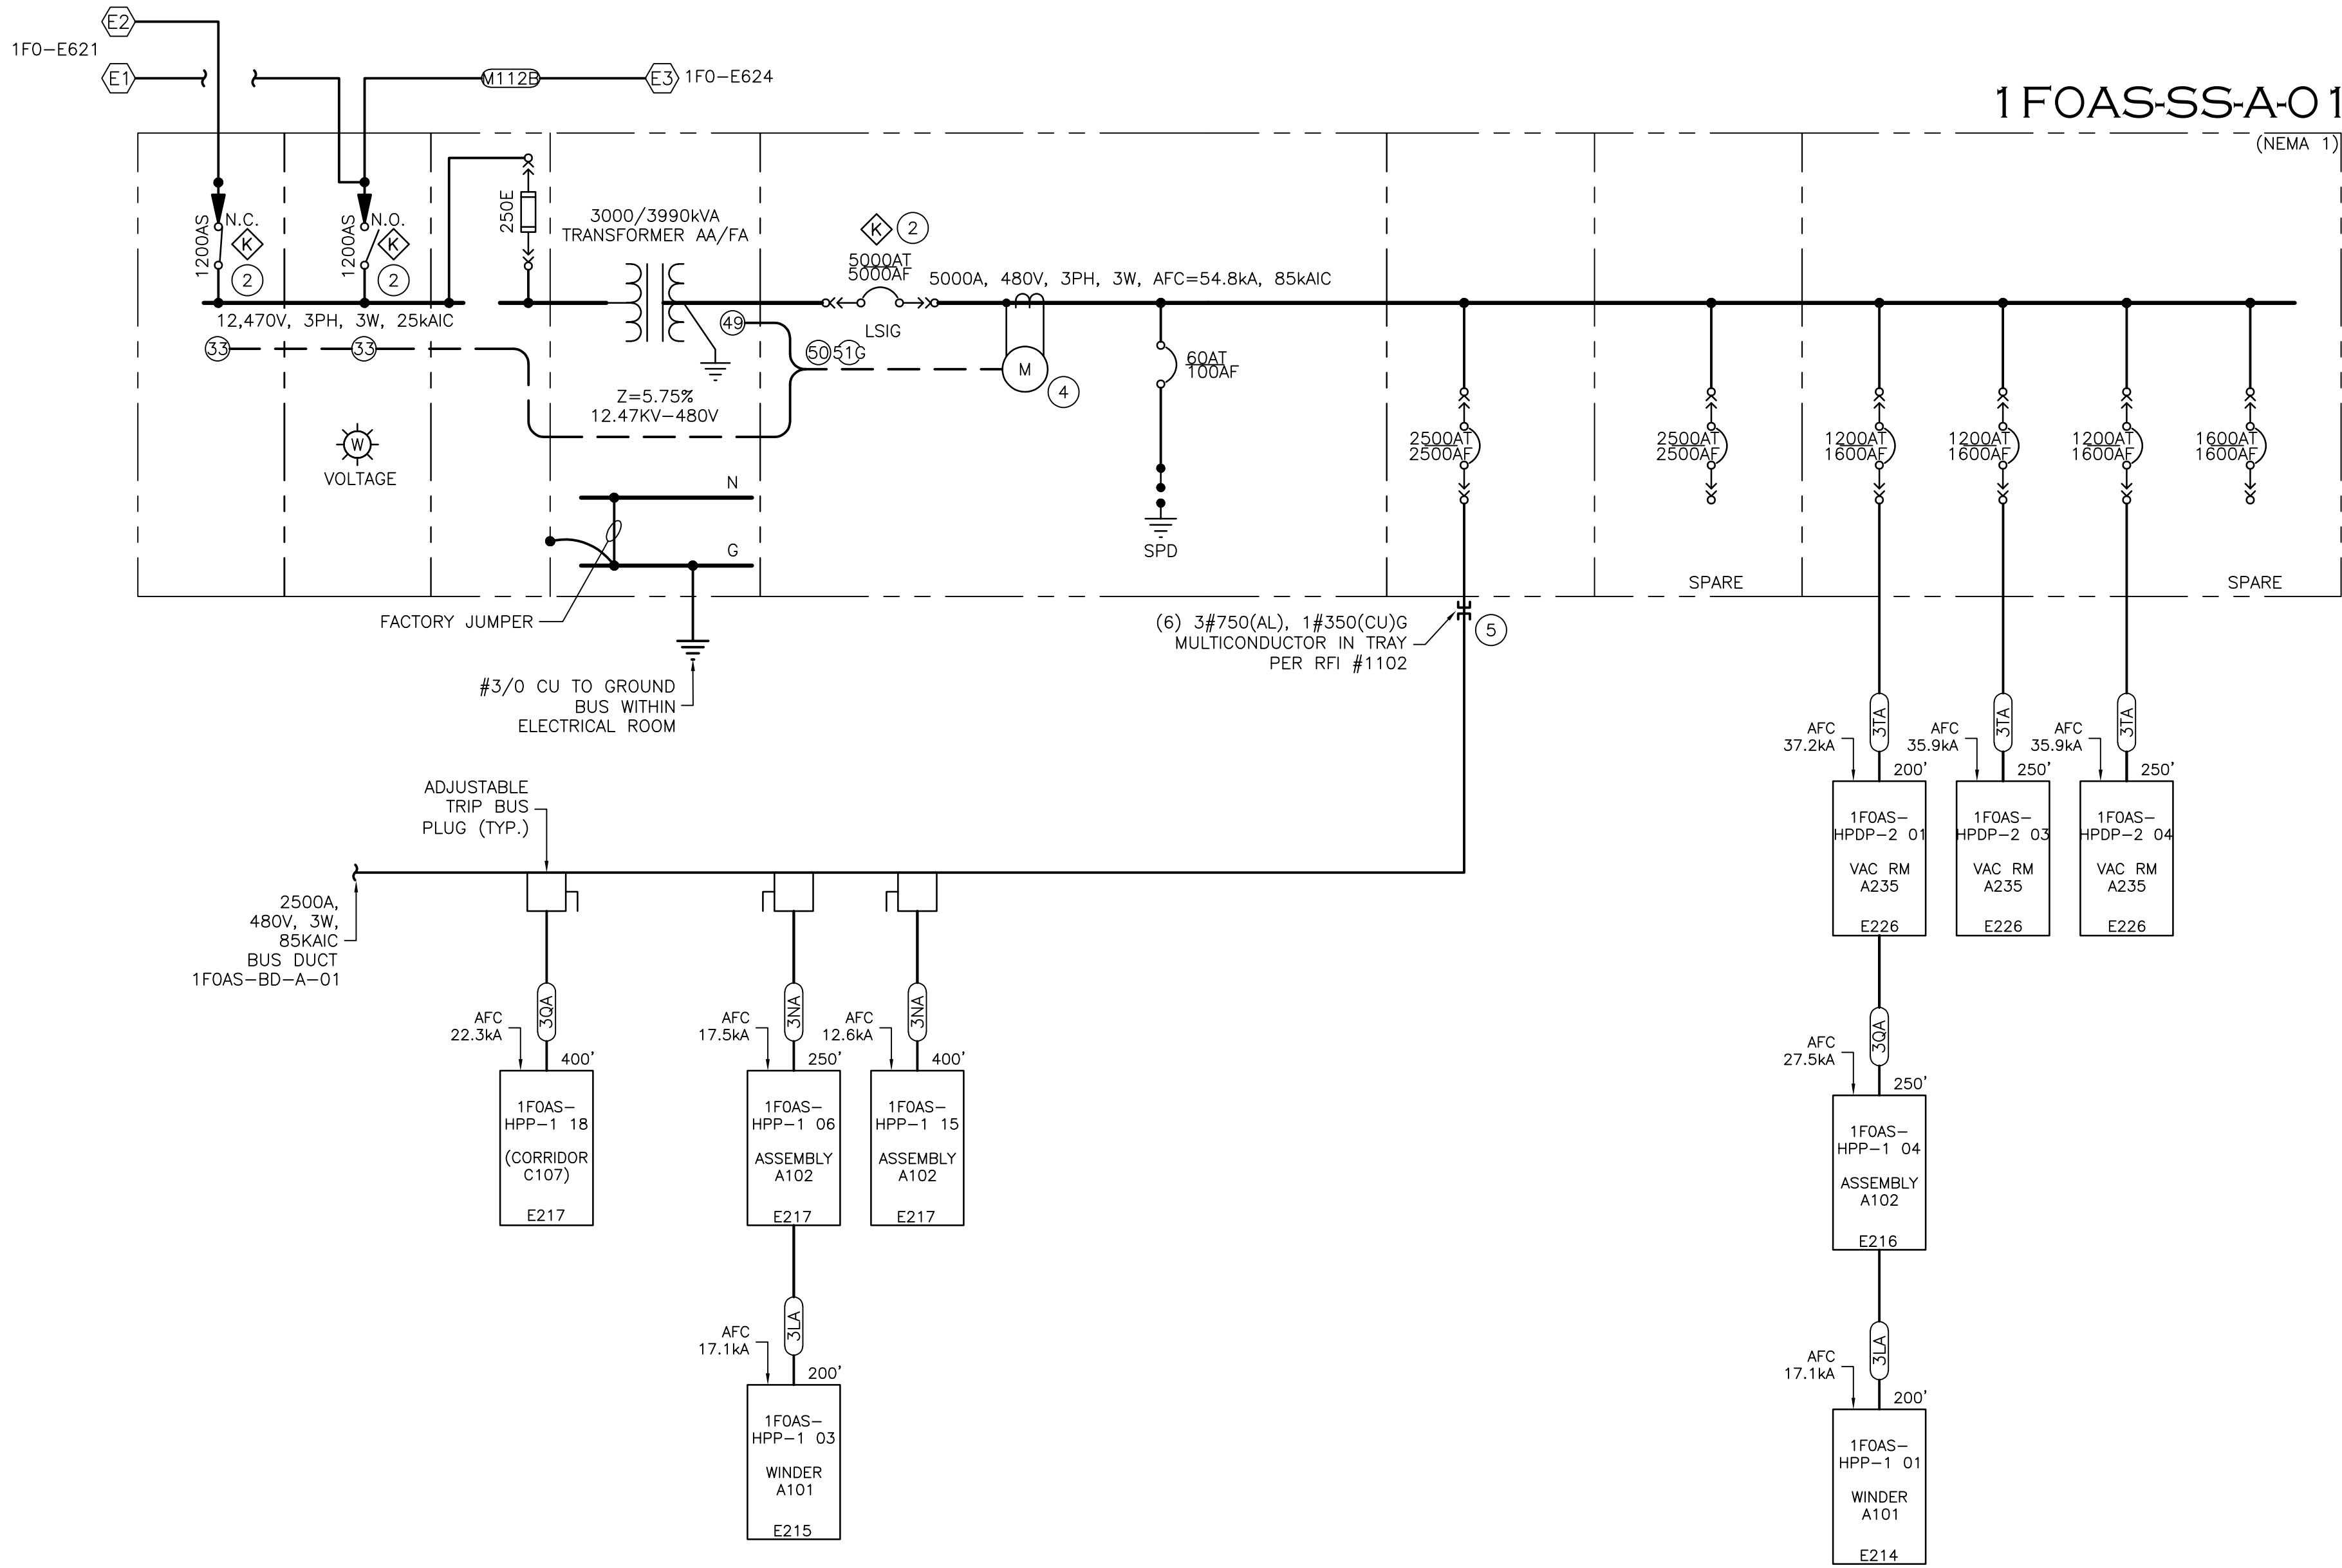

1 ONE LINE DIAGRAM - (1FO) ASSEMBLY "A" (PARTIAL)
NO SCALE

BUS DUCT NAME											
1FOAS-BD-A-01											
BUS PLUG		EQUIPMENT		RATINGS			LOADING (KVA)				NOTES
				AMP	FRAME	TRIP	LOAD	DEM	LOAD	FLA	
LHS LASER WELDER ASSEMBLY 1		TAG #	1	480	150	60	57	0.4	23	68	
LHS LASER WELDER ASSEMBLY 1		2	480	150	60	57	0.4	23	68		
LHS LASER WELDER ASSEMBLY 2		3	480	150	60	57	0.4	23	68		
LHS LASER WELDER ASSEMBLY 2		4	480	150	60	57	0.4	23	68		
LHS LASER WELDER ASSEMBLY 3		5	480	250	80	57	0.4	23	68		
LHS LASER WELDER ASSEMBLY 3		6	480	250	80	57	0.4	23	68		
LHS LASER WELDER ASSEMBLY 4		7	480	250	80	57	0.4	23	68		
LHS LASER WELDER ASSEMBLY 4		8	480	250	80	57	0.4	23	68		
LHS LASER WELDER ASSEMBLY 5		9	480	250	80	57	0.4	23	68		
LHS LASER WELDER ASSEMBLY 5		10	480	250	80	57	0.4	23	68		
1FOAS-HPP-1 18		11	480	600	600	181	1.0	181	218		
1FOAS-HPP-1 06		12	480	400	400	159	1.0	159	192		
1FOAS-HPP-1 15		13	480	400	400	180	1.0	180	216		
FORMATION CNV #1A1		14	480	250	150	59	0.2	12	71		
FORMATION CNV #1A2		15	480	250	125	59	0.2	12	71		
COMMON WASHING 4		16	480	600	500	325	0.4	130	391	FUTURE	
COMMON WASHING 4		17	480	250	40	22	0.4	9	26		
WASHING HEAT 4		18	480	600	500	323	0.4	129	388	FUTURE	
WASHING HEAT 4		19	480	600	500	283	0.4	113	340	FUTURE	
WASHING CUU		20	480	150	40	24	0.4	10	29	FUTURE	
COMMON IR UNLOADER		21	480	250	125	73	0.4	29	88		
EL LEAK DETECTOR		22	480	250	125	83	0.4	33	100		
LINE CT COMMON		23	480	150	75	42	0.4	17	50	FUTURE	
VISUAL INSPECTOR COMMON		24	480	250	100	18	0.4	7	21		
COMMON WASHING 5 FUTURE		25	480	600	500	325	0.4	130	391	FUTURE	
COMMON WASHING 5		26	480	250	40	22	0.4	9	26		
WASHING HEAT 5 FUTURE		27	480	600	500	323	0.4	129	388	FUTURE	
WASHING HEAT 5 FUTURE		28	480	600	500	283	0.4	113	340	FUTURE	
WASHING CUU 5 FUTURE		29	480	150	40	24	0.4	10	29	FUTURE	
COMMON IR UNLOADER 5 FUTURE		30	480	250	125	73	0.4	29	88		
EL LEAK DETECTOR 5 FUTURE		31	480	250	125	83	0.4	33	100		
VISUAL INSPECTOR COMMON 5 FUTURE		32	480	250	100	18	0.4	7	21		
LINE CT COMMON 5 FUTURE		33	480	150	75	42	0.4	17	50	FUTURE	
NOTES: *800A AND ABOVE BUS PLUGS REQUIRE MANUFACTURER INSTALLED BUS PLATE. SEE POWER PLAN FOR LOCATION							TOTAL LOAD (KVA) 3587 1723 TOTAL DEMAND LOAD (KVA) 2072.54 DEMAND AMPS 2500 RATING (A) 83 % LOADING				

3 BUS DUCT LOAD SCHEDULE
NO SCALE

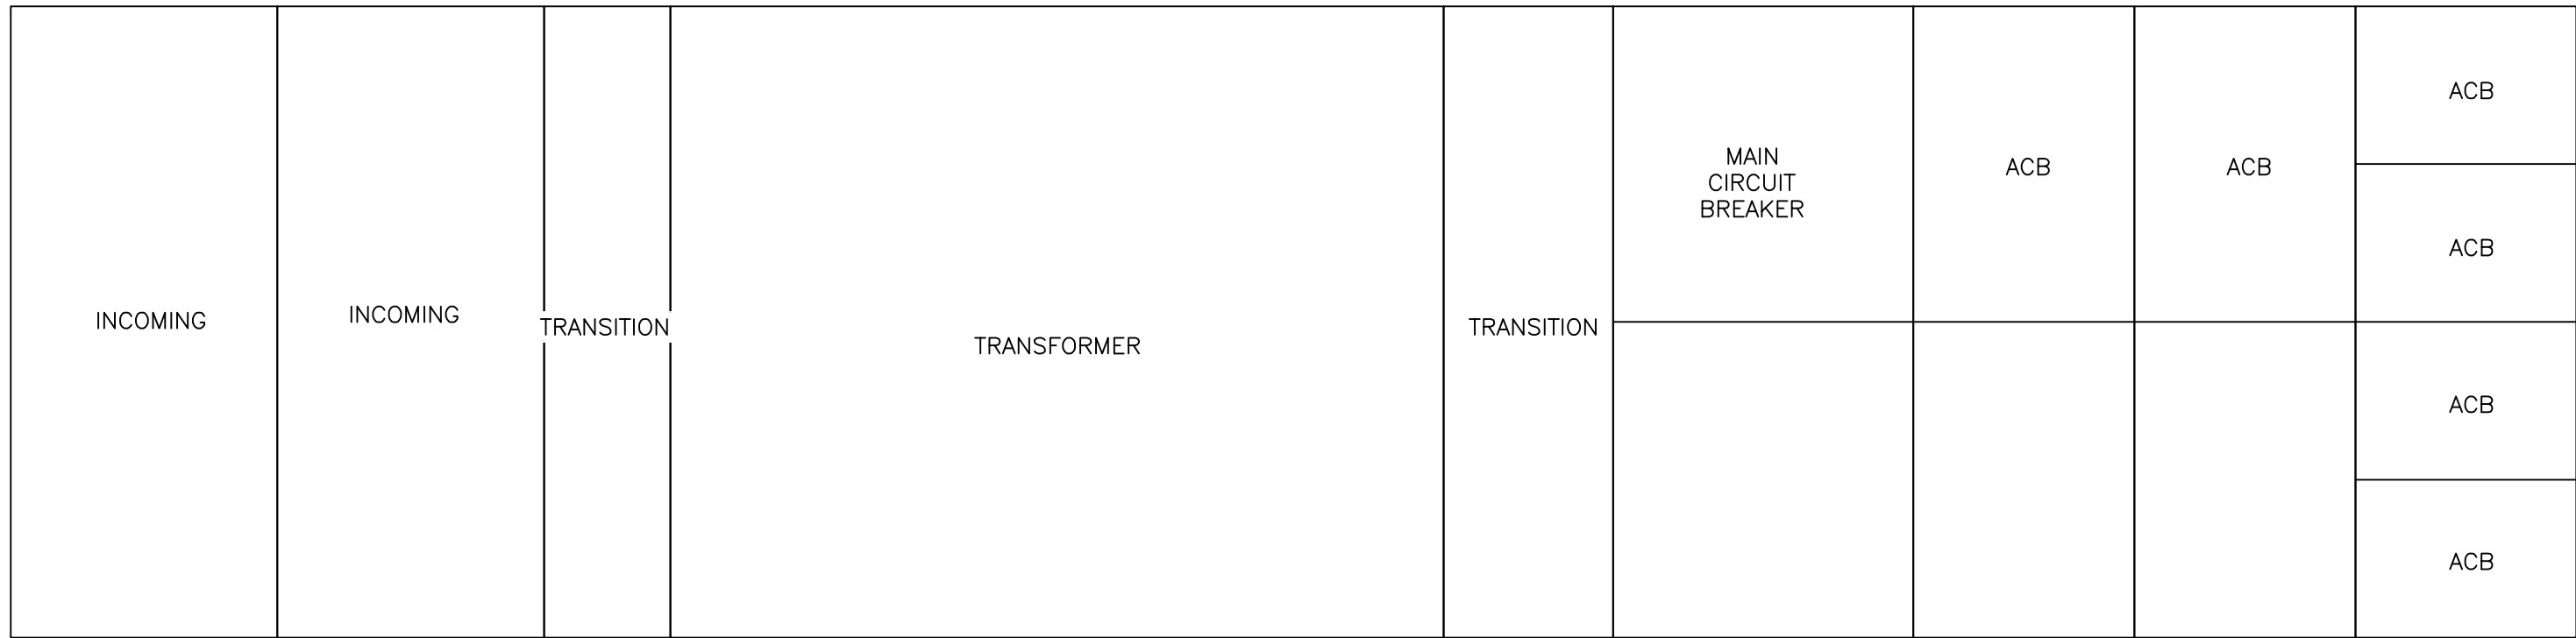

2 EQUIPMENT ELEVATION
NO SCALE

ELECTRICAL ONE LINE DIAGRAM

DATE	REMARKS
02/11/2025	1FO CD REVISIONS
03/11/2025	1FO CD REVISIONS
05/10/2025	1FO CD RESUBMISSION
06/10/2025	1FO CD RESUBMISSION
08/21/2025	1FO PERMIT ADDENDUM
10/23/2025	1FO BULLETIN #1

P&P/M:	WB
DRAWN BY:	ETS/AO/IAUG
JOB NO.:	PHX21-5038-00